

ITEM NO. \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 DATE: \_\_\_\_\_

### SQR-S REFRIGERATED SELF SERVE CASE



- SQR-S 3 36"L.X30"D.X50"H.
- SQR-S 4 48"L.X30"D.X50"H.
- SQR-S 5 60"L.X30"D.X50"H.
- SQR-S 6 72"L.X30"D.X54"H.
- SQR-S 8 96"L.X30"D.X54"H.


#### STANDARD FEATURES

1. Top LED light.
2. Two (2) tempered glass shelves w/LED shelf lights.
3. Stainless steel inlay pan.
4. Exterior & interior finish Black
5. Self contained condensing unit.

#### OPTIONS

- Exterior plastic laminate of choice.
- Stainless steel shelves.
- Stainless steel steps.
- Powder coated metal components.
- Custom units on request.
- Solid side gables with mirrored interiors.
- Remote condensing unit.
- Electric condensate pan.

MODEL	DIMENSIONS	H.P.	ELECTRICAL	COND. UNIT	EVAPORATOR PAN (Optional)	SHIPPING WT.
SQR-S 3	36"L.X30"D.X50"H.	1/2 H.P.	15V/1/60HZ/14.0 AMP	115V/1/60HZ/8.3 AMP	400 lb.	
SQR-S 4	48"L.X30"D.X50"H.	3/4 H.P.	230V/1/60HZ/ 9.4 AMP	115V/1/60HZ/8.3 AMP	450 lb.	
SQR-S 5	60"L.X30"D.X50"H.	3/4 H.P.	230V/1/60HZ/11.5 AMP	115V/1/60HZ/8.3 AMP	590 lb.	
SQR-S 6	72"L.X30"D.X54"H.	1 1/4 H.P.	230V/1/60HZ/17.5 AMP	115V/1/60HZ/8.3 AMP	760 lb.	
SQR-S 8	96"L.X30"D.X54"H.	1 1/2 H.P.	230V/1/60HZ/21.5 AMP	115V/1/60HZ/8.3 AMP	890 lb.	

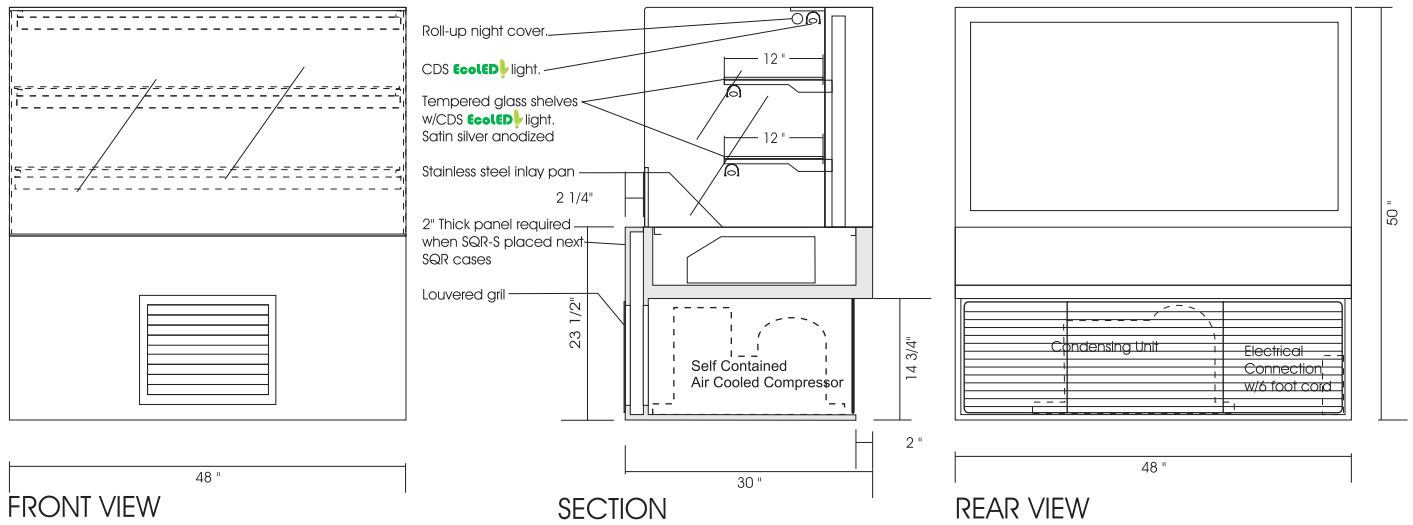

Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24°C (75°F.) with 50% relative humidity. Condensation on glass may occur under hot & humid conditions. Product entering the display case must be 4°Celsius (40°F) or lower.

\* Due to constant improvements, specifications are subject to change without notice.



Canadian Display Systems Inc.  
 1-800-895-5862 (Toll Free)  
[cds1@on.aibn.com](mailto:cds1@on.aibn.com)  
[www.canadiandisplayssystems.com](http://www.canadiandisplayssystems.com)

