


Eurostyle

REFRIGERATED PASTRY/DELI - GRAVITY – RPDW

MODELS: RPDW 4840, RPDW 4848, RPDW 4860, RPDW 4869, RPDW 4878, RPDW 4894

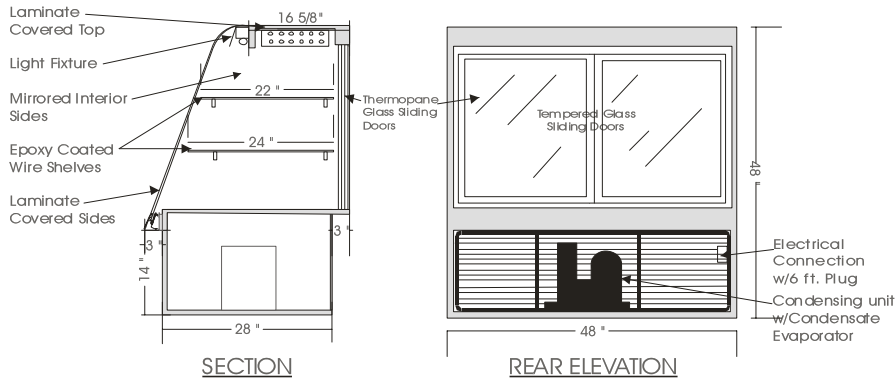

SPECIFICATIONS

MODEL	DIMENSIONS	COMPRESSOR	ELECTRICAL	SHIPPING WT.
RPDW 4840	40"L.X34"D.X48"H.	1/4 H.P.	115V/ 1/60HZ/ 9.0 AMP	400 lb.
RPDW 4848	48"L.X34"D.X48"H.	1/3 H.P.	115V/ 1/60HZ/ 9.0 AMP	480 lb.
RPDW 4860	60"L.X34"D.X48"H.	1/3 H.P.	115V/ 1/60HZ/10.0 AMP	550 lb.
RPDW 4869	69"L.X34"D.X48"H.	1/3 H.P.	115V/ 1/60HZ/10.0 AMP	625 lb.
RPDW 4878	78"L.X34"D.X48"H.	1/2 H.P.	115V/ 1/60HZ/11.0 AMP	740 lb.
RPDW 4894	94"L.X34"D.X48"H.	1/2 H.P.	115V/ 1/60HZ/12.0 AMP	825 lb.

STANDARD FEATURES

1. Top light.
2. Solid sides w/mirrored interior gables.
3. Tempered curved front glass, tilt forward & removable.
4. White epoxy coated wire shelves.
5. Clear satin anodized aluminum hinge.
6. Exterior & interior laminate finish: Black.
7. Self contained compressor w/hot gas condensate evaporator pan.

OPTIONS

1. Shelf lights.
2. Plastic laminate exterior finish of choice.
3. Powder coated or colour anodized hinge.
4. Custom units on request.
5. Remote condensing unit.
6. Front glass defogging system. (Case depth 36" with defogging system)
7. Full extension pull out drawer.

Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24° Celsius (75° F.) with 50% relative humidity.

Condensation on glass may occur under hot & humid conditions.

Product entering the display case must be 4° Celsius (40°F.) or lower.

*Due to constant improvements, specifications are subject to change without notice.



Canadian Display Systems Inc.

177 Westcreek Drive, Woodbridge, Ontario L4L 9N6
 Ph: 905-265-7888, 1-800-895-5862 Fax: 905-265-7692
 email cds1@on.aibn.com
www.canadiandisplayystems.com