


# Grab And Go

## SELF SERVE REFRIGERATED MERCHANDISER – RSS 45

MODELS: RSS 4536, RSS 4548, RSS 4560, RSS 4572, RSS 4596

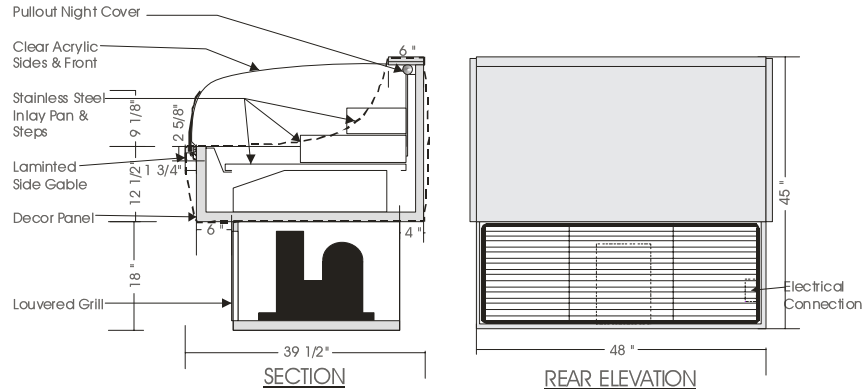

### SPECIFICATIONS

MODEL	DIMENSIONS	UNIT H.P.	ELECTRICAL		SHIPPING WT.
			COND. UNIT	EVAPORATOR PAN (OPT.)	
RSS 4536	36"L.X39 1/2"D.X45"H.	1/2	115/1/60HZ/13.0 AMP.	115/1/60HZ/8.3 AMP.	410 lb.
RSS 4548	48"L.X39 1/2"D.X45"H.	3/4	230/1/60HZ/ 8.0 AMP.	115/1/60HZ/8.3 AMP.	490 lb.
RSS 4560	60"L.X39 1/2"D.X45"H.	3/4	230/1/60HZ/ 9.4 AMP.	115/1/60HZ/8.3 AMP.	500 lb.
RSS 4572	72"L.X39 1/2"D.X45"H.	1	230/1/60HZ/14.9 AMP.	115/1/60HZ/8.3 AMP.	620 lb.
RSS 4596	96"L.X39 1/2"D.X45"H.	1 1/2	230/1/60HZ/17.4 AMP.	115/1/60HZ/8.3 AMP.	810 lb.

*Direct connection to Condensing unit, Evaporator pan (Optional)*

*Floor drain highly recommended for these units. Add 3/4" for each side for end gables. Front air intake ventilation grill.*

#### STANDARD FEATURES

1. Two removable stainless steel steps.
2. Pull down night cover.
3. Exterior & interior laminate finish: Black.
4. Stainless steel inlay pan.
5. Stainless steel deck and perforated back.
6. Self contained condensing unit.
7. Laminated side gables.

#### OPTIONS

1. Plastic laminate exterior finish of choice.
2. Bumper rails.
3. Powder coated metal display risers inlay pan.
4. Condensate evaporator pan.
5. Light fixture.
6. Remote condensing unit.

Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24° Celsius (75°F.) with 50% relative humidity.

Condensation on glass may occur under hot & humid conditions.

Product entering the display case must be 4° Celsius (40°F.) or lower.

\*Due to constant improvements, specifications are subject to change without notice.



## Canadian Display Systems Inc.

177 Westcreek Drive, Woodbridge, Ontario L4N1 9N6  
Ph: 905-265-7888, 1-800-895-5862 Fax: 905-265-7692

email [cds1@on.aibn.com](mailto:cds1@on.aibn.com)

[www.canadiandisplayssystems.com](http://www.canadiandisplayssystems.com)