


# Grab And Go

## REF. SELF SERVE /REF. SERVE MERCHANDISER – RSRS 67

MODELS: RSRS 6738, RSRS 6748, RSRS 6760

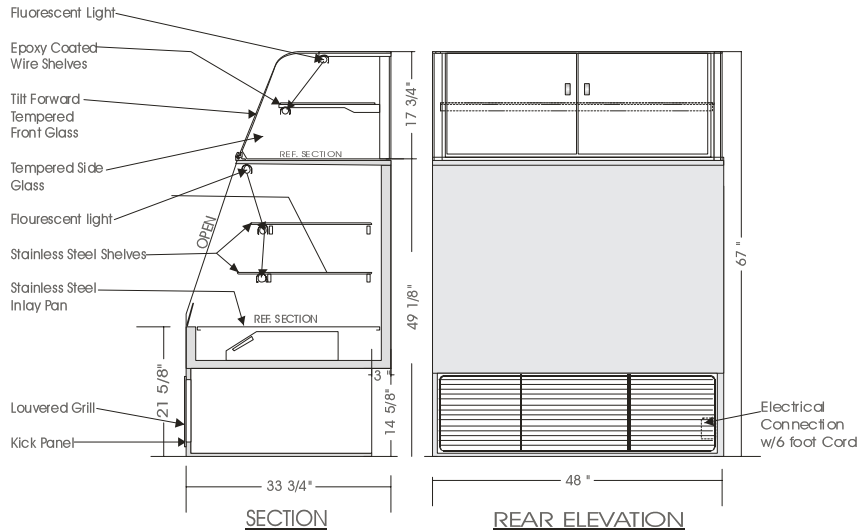

### SPECIFICATIONS

MODEL	DIMENSIONS	UNIT	ELECTRICAL(DUAL VOLTAGE 1 Ph/60Hz)			SHIPPING
			H.P.	COND. UNIT	LIGHTS	
RSRS 6738	38"L.X33 <sup>3</sup> / <sub>4</sub> "D.X67"H.	<sup>3</sup> / <sub>4</sub>	230V/1/60 HZ 8.0 AMPS	115V/2.0 AMPS	115V/8.3 AMPS	450 lb.
RSRS 6748	48"L.X33 <sup>3</sup> / <sub>4</sub> "D.X67"H.	<sup>3</sup> / <sub>4</sub>	230V/1/60 HZ 8.0 AMPS	115V/2.0 AMPS	115V/8.3 AMPS	510 lb.
RSRS 6760	60"L.X33 <sup>3</sup> / <sub>4</sub> "D.X67"H.	<sup>3</sup> / <sub>4</sub>	230V/1/60 HZ 9.4 AMPS	115V/2.5 AMPS	115V/8.3 AMPS	590 lb.

*Direct connection to Condensing unit, Light & Evaporator pan(Optional).*  
*Floor drain highly recommended for these units. Front air intake ventilation grill.*

#### STANDARD FEATURES

1. Top light.
2. Tempered side glass, removable.
3. Tempered curved front glass tilt forward and removable.
4. Clear satin anodized aluminum hinge & framework.
5. Self contained air cooled compressor
6. Exterior & interior laminate finish: Black.

#### OPTIONS

1. Additional shelf lights.
2. Plastic laminate exterior finish of choice.
3. Powder coated or colour anodized hinge & framework.
4. Bumper rails – specify colour & location.
5. Remote condensing unit.
6. Evaporator condensate pan.

Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24° Celsius (75°F.) with 50% relative humidity. Condensation on glass may occur under hot & humid conditions.  
 Product entering the display case must be 4° Celsius (40°F.) or lower.

\*Due to constant improvements, specifications are subject to change without notice.



## Canadian Display Systems Inc.

177 Westcreek Drive, Woodbridge, Ontario L4L 9N6  
 Ph: 905-265-7888, 1-800-895-5862 Fax: 905-265-7692  
 email [cds1@on.aibn.com](mailto:cds1@on.aibn.com)  
[www.canadiandisplayssystem.com](http://www.canadiandisplayssystem.com)