

PROJECT:


QUANTITY:

ITEM: NO:

# Grab And Go

## SELF SERVE REFRIGERATED MERCHANDISER – RSS 51

MODELS: RSS 5136, RSS 5148, RSS 5160, RSS 5172, RSS 5196

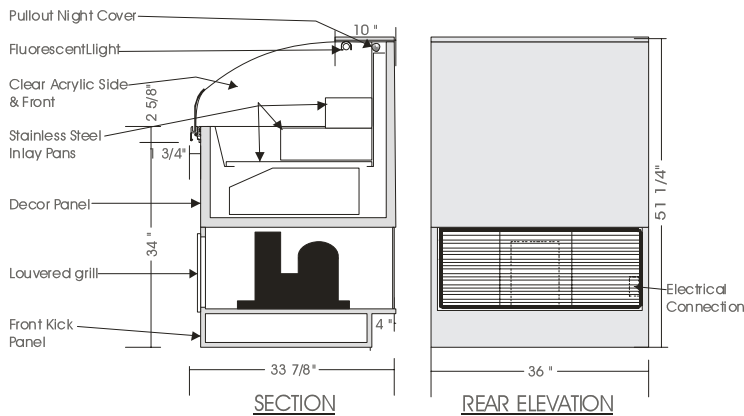

### SPECIFICATIONS

MODEL	DIMENSIONS	UNIT	ELECTRICAL			SHIPPING WT.
			COND. UNIT	LIGHTS	EVAPORATOR PAN	
RSS 5136	36"L.X33 <sup>7</sup> / <sub>8</sub> "D.X51 <sup>1</sup> / <sub>4</sub> "H.	1/2	115V/1/60 HZ/13.0 AMP.	115V/ .5 AMP	115V/8.3 AMP.	390 lb.
RSS 5148	48"L.X33 <sup>7</sup> / <sub>8</sub> "D.X51 <sup>1</sup> / <sub>4</sub> "H.	1/2	115V/1/60 HZ/13.0 AMP.	115V/ .6 AMP	115V/8.3 AMP.	480 lb.
RSS 5160	60"L.X33 <sup>7</sup> / <sub>8</sub> "D.X51 <sup>1</sup> / <sub>4</sub> "H.	3/4	230V/1/60 HZ/ 8.0 AMP.	115V/1.0 AMP	115V/8.3 AMP.	580 lb.
RSS 5172	72"L.X33 <sup>7</sup> / <sub>8</sub> "D.X51 <sup>1</sup> / <sub>4</sub> "H.	3/4	230V/1/60 HZ/ 9.4 AMP.	115V/1.5 AMP	115V/8.3 AMP.	620 lb.
RSS 5196	96"L.X33 <sup>7</sup> / <sub>8</sub> "D.X51 <sup>1</sup> / <sub>4</sub> "H.	1 1/4	230V/1/60 HZ/14.9 AMP.	115V/2.0 AMP	115V/8.3 AMP.	790 lb.

*Direct Connection to Condensing unit, Light & Evaporator pan (Optional)*

*Floor drain highly recommended for these units. Front air intake ventilation grill.*

#### STANDARD FEATURES

1. Two removable stainless steel step.
2. Pull down night cover.
3. Standard high pressure laminate. Black.
4. Stainless steel deck and perforated back.
5. Self contained condensing unit.

#### OPTIONS

1. Plastic laminate exterior finish of choice.
2. Powder coated metal display riser and inlay pan.
3. Condensate evaporator.
4. Remote condensing unit.
5. Laminated side gables.

*Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24° Celsius (75°F.) with 50% relative humidity.*

*Condensation on glass may occur under hot & humid conditions.*

*Product entering the display case must be 4° Celsius (40°F.) or lower.*

\*Due to constant improvements, specifications are subject to change without notice.



## Canadian Display Systems Inc.

177 Westcreek Drive, Woodbridge, Ontario L4L 9N6  
Ph: 905-265-7888, 1-800-895-5862 Fax: 905-265-7692

email [cds1@on.aibn.com](mailto:cds1@on.aibn.com)

[www.canadiandisplayssystems.com](http://www.canadiandisplayssystems.com)