


# Grab And Go

## UPRIGHT SELF SERVE REFRIGERATED MERCHANDISER – RSS 66

MODELS: RSS 6636, RSS 6648, RSS 6660, RSS 6672, RSS 6696

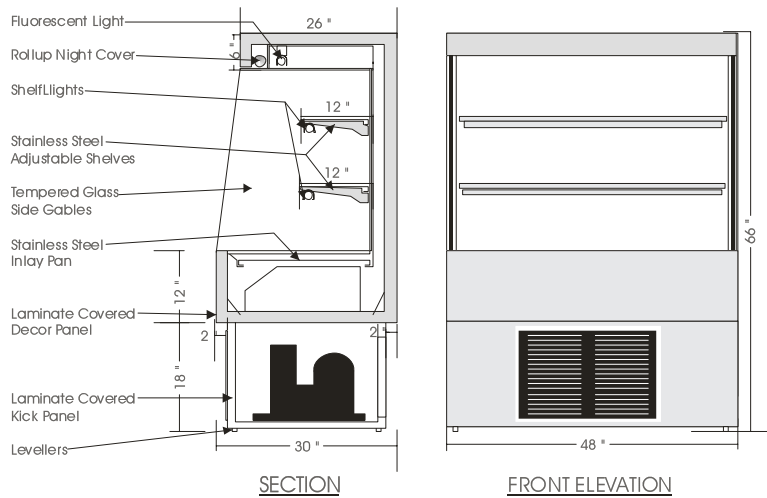

### SPECIFICATIONS

MODEL	DIMENSIONS	UNIT H.P.	ELECTRICAL (DUAL VOLTAGE) 1 PH/60 HZ			SHIPPING WT.
			COND. UNIT	LIGHTS	EVAPORATOR PAN	
RSS 6636	36"L.X30"D.X66"H.	3/4	230V/08.0 AMP	115V/1.5 AMP	115V/8.3 AMP	440 lb.
RSS 6648	48"L.X30"D.X66"H.	3/4	230V/08.0 AMP	115V/2.0 AMP	115V/8.3 AMP	540 lb.
RSS 6660	60"L.X30"D.X66"H.	3/4	230V/09.4 AMP	115V/2.5 AMP	115V/8.3 AMP	780 lb.
RSS 6672	72"L.X30"D.X66"H.	1	230V/14.9 AMP	115V/3.0 AMP	115V/8.3 AMP	890 lb.
RSS 6696	96"L.X30"D.X66"H.	1 1/2	230V/17.4 AMP	115V/5.0 AMP	115V/8.3 AMP	1090 lb.

*Direct connection to Condensing unit, Light & Evaporator pan (Optional).*

*Floor drain highly recommended for these units. Front air Intake ventilation grill.*

*Allow 6" space between wall & unit for air circulation.*

#### STANDARD FEATURES

1. Top light and two shelf lights.
2. Two adjustable stainless steel shelves.
3. Pull down night cover.
4. Exterior & interior laminate finish: Black.
5. Stainless steel deck and perforated back.
6. Self contained condensing unit.

#### OPTIONS

1. Plastic laminate exterior finish of choice.
2. Powder coated finish in display area.
3. Bumper rails – specify colour and location.
4. Condensate evaporator pan.
5. Rear access doors.
6. Rounded side gables.
7. Remote condensing unit.

*Operating temperature of 2° to 4° Celsius (37° to 40°F.) under normal store conditions of 24° Celsius (75°F.) with 50% relative humidity.*

*Condensation on glass may occur under hot & humid conditions.*

*Product entering the display case must be 4° Celsius (40°F.) or lower.*

\*Due to constant improvements, specifications are subject to change without notice.



## Canadian Display Systems Inc.

177 Westcreek Drive, Woodbridge, Ontario L4L 9N6  
 Ph: 905-265-7888, 1-800-895-5862 Fax: 905-265-7692  
 email [cgs1@on.aibn.com](mailto:cds1@on.aibn.com)  
[www.canadiandisplayystems.com](http://www.canadiandisplayystems.com)